

Fast. Smart. Clean.



UNION HXL8000-K Series

NOW THERE IS ONE SYSTEM
FOR ALL ALTERNATIVES!



The Ideal Drycleaning System For Alternative Solvents.



UNION HXL8018S-K / HXL8025S-K

Fast. Smart. Clean.



All models of Series HXL8000-K are multi-solvent, designed to get the best from the SYSTEMK4 as well as hydrocarbon and silicone solvent.

Exceptional cleaning, economy and ecological performance in 40 and 60 lbs load capacities. Large-access loading door. Cyclonic Airflo® basket. Dialog® Computer with Dialog Plus®.

Frontal digital solvent/air temperature display panels. Easy front access to electronics, computer and still control components.

All models of Series HXL8000-K are equipped with three independent self-cleaning solvent tanks equipped with level control sight-glasses.

Extra-large Turbo 2® Fan and modular refrigeration system let you remove the evaporator fridge coil for easy maintenance.


Newly designed large gravitational water separator with sight-glasses.

ACTIVA spray system is available as an option for special cleaning processes.



UNION HXL8018S-K / HXL8025S-K

Fast. Smart. Clean.

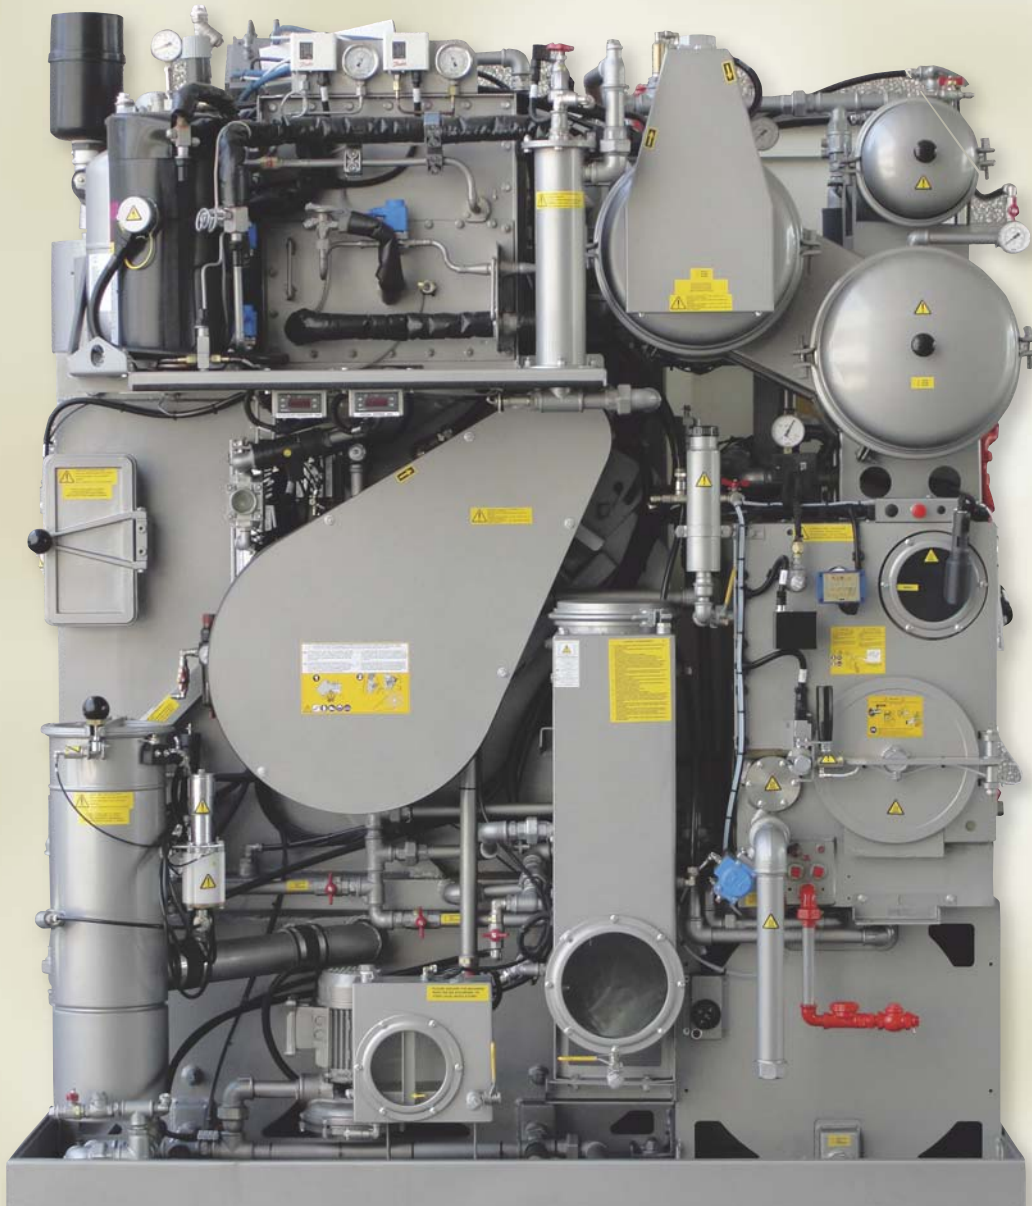

Logical, and ergonomically designed for convenient, easy access to all components for quick maintenance. Multiple, independent spin disc EcoFilters® and carbon cartridge filters. Convenient access to oversized double lint filters and button trap. Extra-large Turbo 2® Fan and modular refrigeration system.

Optional Idromatic® with Pneumo Still® Still Cleaning System.

Easily accessible piping. High-efficiency pumps. Industrial grade stainless steel and brass in all critical areas. Still overflow protection and heavy-duty steel containment base. 24-volt computer circuitry.

Dialog Plus® is the latest advance in computerized operation technology for drycleaning.

It is standard on every new Union K Series System! With Dialog Plus® you can run different multiple programs without having to change temperature settings or inverter drive speeds.

All electronic components ETL-listed (for North America) or CE Standard.



The Ideal Drycleaning System For Alternative Solvents.

Technical Specifications

		HXL8018S-K	HXL8025S-K
LOAD CAPACITY	Lbs	40	55 ÷ 60
BASKET			
Volume	cu.ft.	12	17.7
Diameter	inches	35.4	39.4
Depth	inches	21	25.2
Wash speed	rpm	12 - 50	12 - 50
Extract speed	rpm	300 - 520	300 - 520
Door opening	inches	20	20
TANKS			
Useful volume tank 1	gal	31	38
Useful volume tank 2	gal	31	38
Useful volume tank 3	gal	42	52
STILL			
Useful Still Volume at half inspection	gal	38.3	50
Total Still Volume	gal	47.6	61
NYLON FILTER			
Volume nylon filter housing	gal	14.5	14.5
Nylon filter area	ft ²	42	42
Filter disks	nr	26	26
PURITAN FILTER			
Volume Puritan filter housing	gal	3.5	3.5
Tubes numbers	nr	1	1
Cartridges quantity	nr	1	1
DUAL CARTRIDGE FILTER			
Volume Dual cartridge filter housing	gal	14.5	14.5
Tubes numbers	nr	1	1
Cartridges quantity	nr	2	2
ELECTRIC POWER (220V 3ph 60Hz)			
Wash / Extract motor - with Inverter *	Hp	1.7 - 4.7	2.7 - 7.5
Solvent pump motor	Hp	1	1
Fan motor	Hp	3.5	3.5
Refrigerator compressor	Hp	5	5
Nylon filter motor	Hp	0.75	0.75
Vacuum Pump Motor	Hp	0.5	0.5
Working power (STEAM MACHINE)	Kw	8.5	9.5
CONNECTIONS SUPPLY			
Compressed air inlet	Ø	1/4"	1/4"
Water inlet	Ø	3/4"	3/4"
Water outlet	Ø	3/4"	3/4"
Steam Still and heater inlet	Ø	1/2"	1/2"
Condensate Still and heater outlet	Ø	1/2"	1/2"
MACHINES WEIGHTS			
Empty machine weight	lbs	3704	4630
MACHINES DIMENSIONS			
(A) Width front Machine	inches	70.9+6	78.7+6
(B) Depth	inches	65	74.8
(C) Height With Fan	inches	85.4	88.2

• POWER CHANGES ACCORDINGLY TO THE USE OF THE MACHINE
 Note: Acoustic emission level of the machines is lower than 70 dB (A)
 Specifications subject to change without notice.
 Some items can be removed for additional clearances, please call Union for details.



UNION DRYCLEANING PRODUCTS USA
 1900 Meredith Park Dr.
 McDonough, GA 30253
 Tel: 1.800.433.9401 - Fax: 404.361.2454
 E-mail: info@uniondc.com
 Web page: www.uniondc.com

