




TECHNICAL INFORMATION



XP 8015

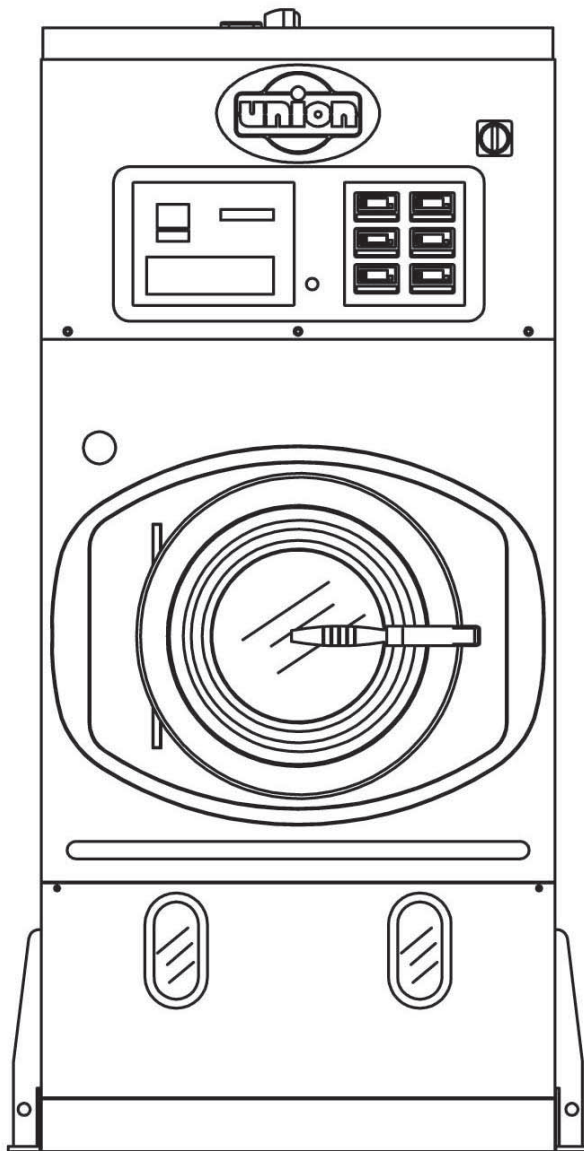

WORKING MACHINE WITH SOLVENT	PERCHLORETHYLENE	
MACHINE CAPACITY	15 Kg	35 Lbs

BASKET		
Diameter	800 mm	31.5 inches
Depth	560 mm	22 inches
Volume	285 Lt	10.1 cu.ft
Wash speed	20 ÷ 50 rpm	
Extract speed	300 ÷ 450 rpm	
Door opening	500 mm	19.7 inches

SOLVENT TANKS		
Useful volume tank 1	105 Lt	28 gal
Useful volume tank 2	105 Lt	28 gal
Useful volume tank 3	- Lt	- gal
FLOOR SAFETY TANK CAPACITY	200 Lt	52.8 gal

STILL		
Useful volume at half inspection	144 Lt	30 gal
Total volume	164 Lt	43.3 gal
Boiler water capacity	4 Lt	1.1 gal


ELECTRIC POWER	400 V - 50HZ		220 V - 60HZ	
Wash - Extract (With Inverter)	*0.8÷4 Hp	*0.6÷3 Kw	*0.8÷4 Hp	*0.6÷3 Kw
Solvent pump motor	0.75 Hp	0.55 Kw	0.75 Hp	0.55 Kw
Fan motor	2 Hp	1.5 Kw	2 Hp	1.5 Kw
Refrigerator compressor (Bristoll)	3.35 Hp	2.5 Kw	3.35 Hp	2.5 Kw
Nylon filter motor	0.75 Hp	0.55 Kw	0.75 Hp	0.55 Kw
Sludge pump (optional)	0.75 Hp	0.55 Kw	0.75 Hp	0.55 Kw
Still electric elements	-	7.5 Kw	-	7.5 Kw
Heater electric elements	-	5.85 Kw	-	5.85 Kw
Air motor compressor (optional)	0.5 Hp	0.38 Kw	-	-
Fan motor Recuper 101 (optional)	0.75 Hp	0.55 Kw	0.75 Hp	0.55 Kw


* POWER CHANGES ACCORDINGLY TO THE USE OF THE MACHINE


NOTE: Acoustic emission level of the machine is lower than 70 dB (A)




FILTRATION AVAILABLE IN THIS MODEL

ONE NYLON FILTER			
	Volume nylon filter housing	35 Lt	<i>9.2 gal</i>
	Nylon filter area	2.1 mt²	<i>22.6 ft²</i>
	Filter disks	14 nr	


ONE NYLON FILTER AND ONE LARGE CARTRIDGE - KR			
	Volume nylon filter housing	35 Lt	<i>9.2 gal</i>
	Nylon filter area	2.1 mt²	<i>22.6 ft²</i>
	Filter disks	14 nr	
	Vol. large cartridge housing KR	35 Lt	<i>9.2 gal</i>
	Area large cartridge KR	2.6 mt²	<i>28 ft²</i>
	Cartridges quantity KR	nr 1	

TWO NYLON FILTER			
	Volume nylon filter housing	35x2=70 Lt	<i>9.2x2=18.4 gal</i>
	Nylon filter area	2.1x2=4.2 mt²	<i>22.6x2=45.2 ft²</i>
	Filter disks	14x2=28 nr	

ONE NYLON FILTER AND ONE DECOLORATING FILTER PR			
	Volume nylon filter housing	35 Lt	<i>9.2 gal</i>
	Nylon filter area	2.1 mt²	<i>22.6 ft²</i>
	Filter disks	14 nr	
	Decolorating housing volume PR	13 Lt	<i>3,4 gal</i>
	Decolorating cartridges	1 nr	
	Decolorating cabon quantity	2 kg	<i>4,4 Lbs</i>




DIMENSIONS AND WEIGHTS

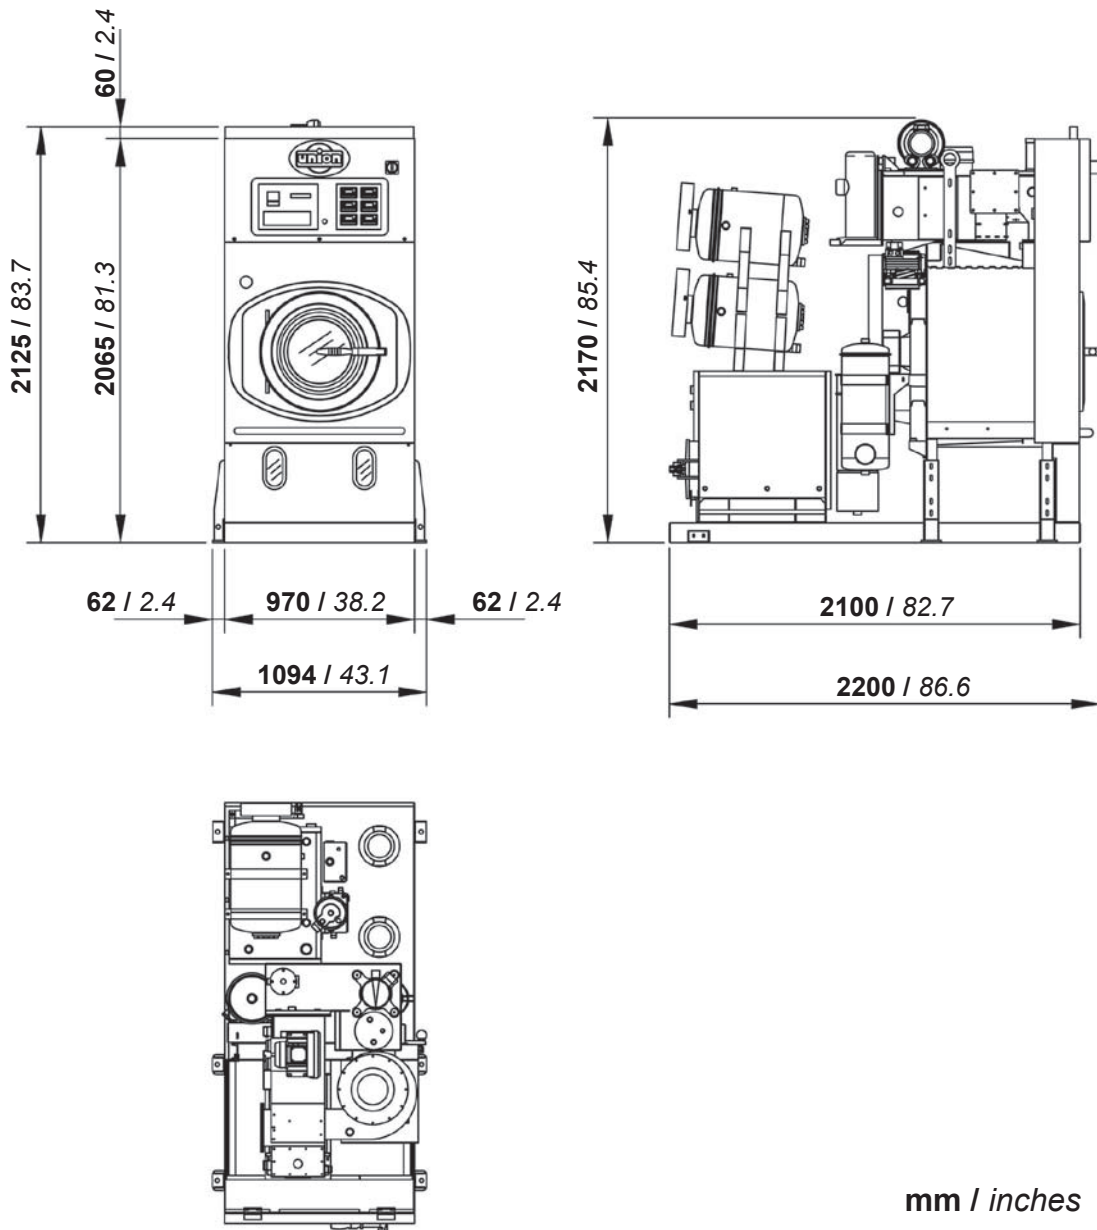

CHARGES - STANDARD VERSION		
Empty machine weight	1115 Kg	2458 Lbs
Machine weight with solvent	1563 Kg	3446 Lbs
Static charge on the floor with solvent	767 Kg/m²	157 Lbs/ft ²
Dynamic charge on the floor (+10%)	1025 Kg/m²	210 Lbs/ft ²
CHARGES - U2000 VERSION		
Empty machine weight	1195 Kg	2635 Lbs
Machine weight with solvent	1643 Kg	3622 Lbs
Static charge on the floor with solvent	807 Kg/m²	165 Lbs/ft ²
Dynamic charge on the floor (+10%)	1065 Kg/m²	218 Lbs/ft ²



PACKAGED MACHINE DIMENSIONS AND WEIGHTS


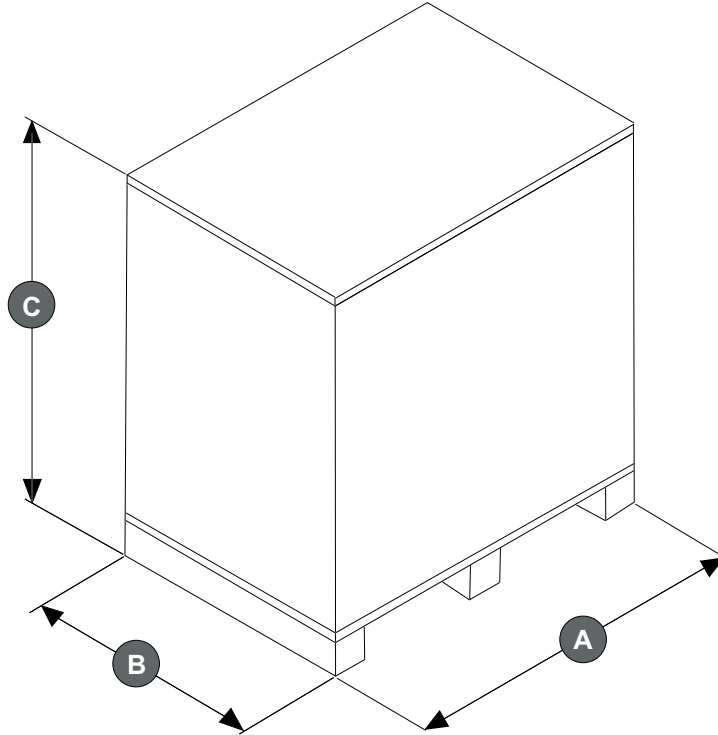


PACKAGED MACHINE DIMENSIONS							
Machine type		Carton		Wooden cage		Wooden case	
Standard	A	2280 mm	89.8 inches	- mm	- inches	- mm	- inches
	B	1160 mm	45.7 inches	- mm	- inches	- mm	- inches
	C	2245 mm	88.4 inches	- mm	- inches	- mm	- inches
U2000	A	2280 mm	89.8 inches	- mm	- inches	- mm	- inches
	B	1160 mm	45.7 inches	- mm	- inches	- mm	- inches
	C	2245 mm	88.4 inches	- mm	- inches	- mm	- inches

PACKAGED MACHINE WEIGHTS							
Machine type		Carton		Wooden cage		Wooden case	
Standard		1205 Kg	2657 Lbs	- Kg	- Lbs	- Kg	- Lbs
U2000		1285 Kg	2833 Lbs	- Kg	- Lbs	- Kg	- Lbs



FIXING POINTS

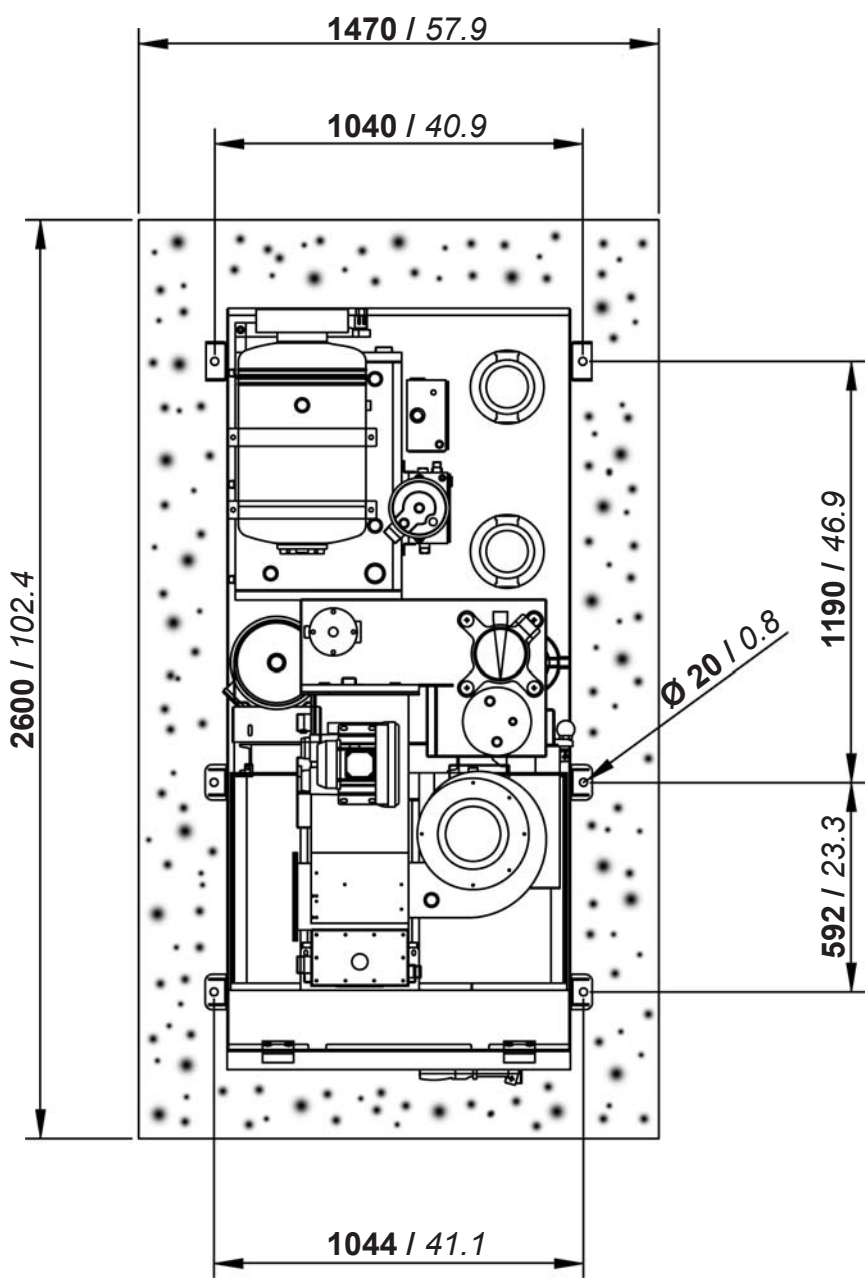


mm / inches





CONNECTIONS

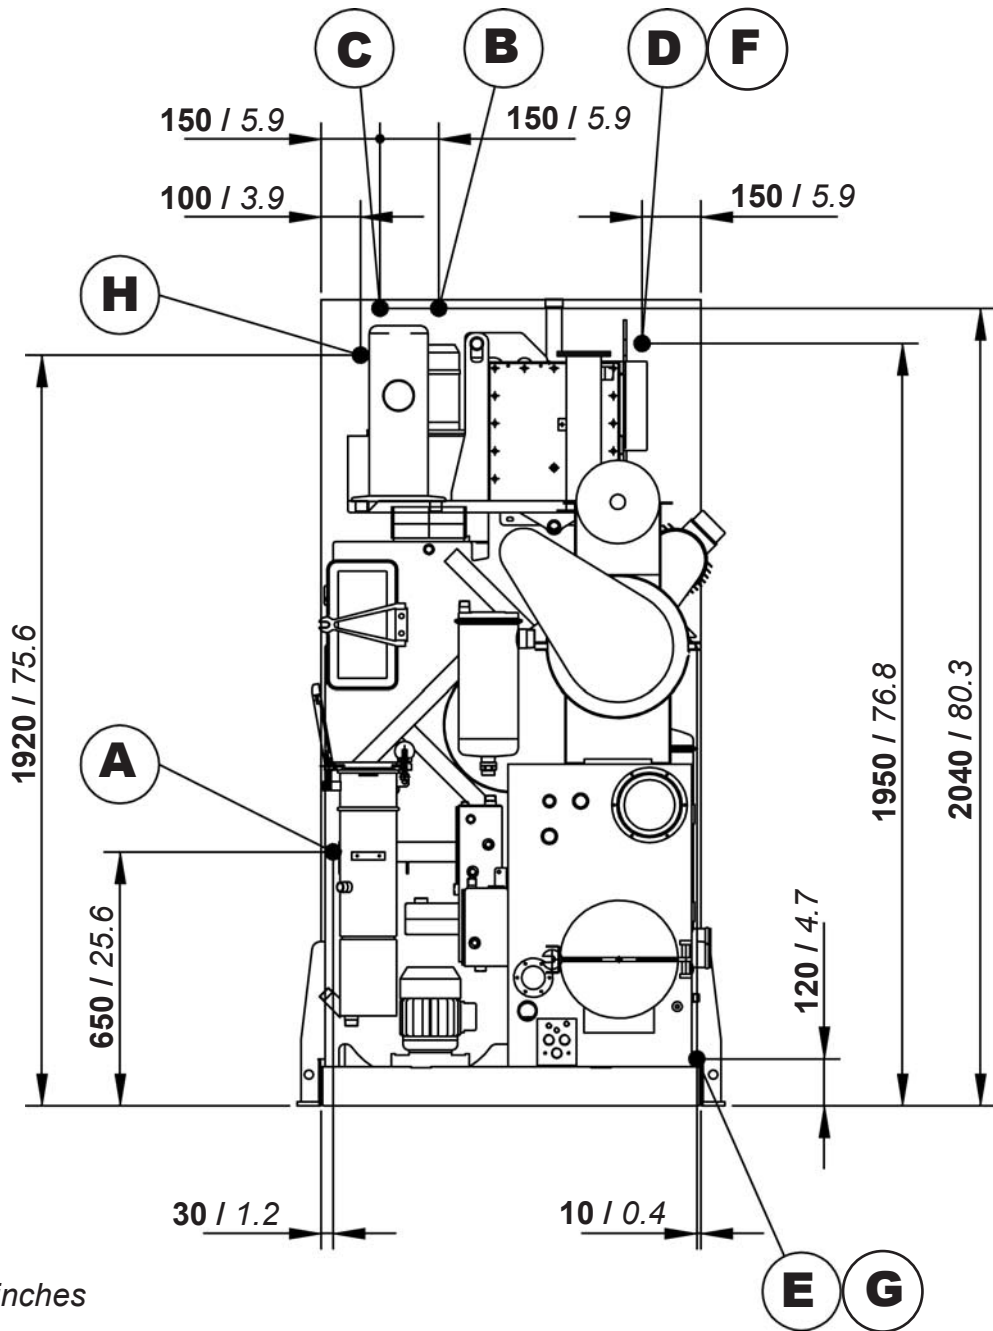

mm / inches

A	Compressed air inlet	mm 6	Ø 1/4"
B	Water inlet	Ø 3/4"	
C	Water outlet	Ø 3/4"	
D	Steam still inlet	Ø 1/2"	
E	Condensate still outlet	Ø 1/2"	
F	Steam heater inlet	Ø 1/2"	
G	Condensate heater outlet	Ø 1/2"	
H	Electric connection		



SOLVENT TYPE	PERCHLOROETHYLENE			
NECESSARY QUANTITY OF SOLVENT TO FILL THE MACHINE				
Machine version - without Filters	210 Lt	336 Kg	55.5 gal	741 Lbs
Machine version - 1 Nylon Filter	245 Lt	392 Kg	65 gal	864 Lbs
Machine version - 1 Nylon Filter + 1 KR	280 Lt	448 Kg	74 gal	988 Lbs
Machine version - 2 Nylon Filters	280 Lt	448 Kg	74 gal	988 Lbs
Machine version - 1 Nylon Filter + 1 Deco	258 Lt	413 Kg	68.5 gal	911 Lbs

INFORMATION FOR THE ELECTRICAL CONNECTIONS (400 V - 50 Hz)		
ELECTRIC Version	18 Kw	30 Amp
STEAM Version	5.5 Kw	8.5 Amp
Dissipated heat	3250 Kcal	

INFORMATION FOR THE ELECTRICAL CONNECTIONS (220 V - 60 Hz)		
ELECTRIC Version	- Kw	- Amp
STEAM Version	5.5 Kw	20 Amp
Dissipated heat	3250 Kcal	

GENERAL INFORMATION		
Required water capacity	Lt/min 10	gal/min 2.6
Required water pressure	bar 2 ÷ 3	psi 29 ÷ 44
Required water temperature	°C 18 ÷ 23	°F 65 ÷ 73
Required air pressure	bar 7 ÷ 8	psi 100 ÷ 115
Required steam pressure (Steam Version)	bar 4 ÷ 5	psi 55 ÷ 70
Required steam availability	Kg/h 40	Lbs/h 88

All technical data are subject to change without notice.